


**MODEL NUMBER:**

- 2064.461 Serin Single Control Wall Mount Grid Drain

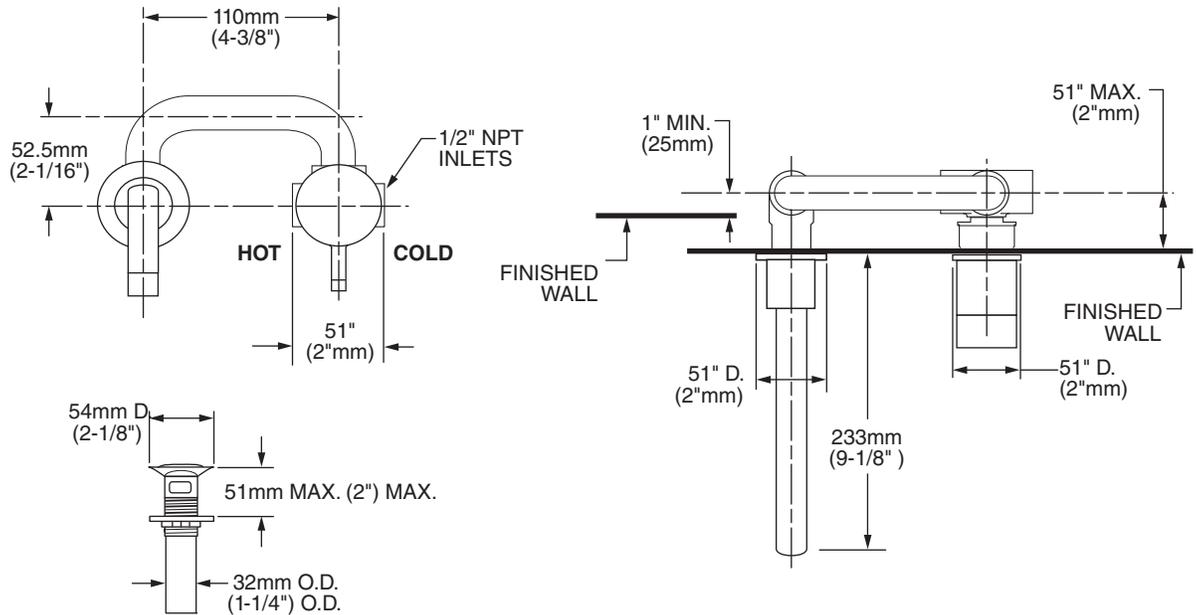

**GENERAL DESCRIPTION:**

Cast brass valve body on 4" centers. 35mm washerless ceramic disc valve cartridge with integral hot limit safety stop. Brass spout, metal lever handle. All brass grid drain body with 1-1/4" (32mm) tailpiece. 1.5 gpm/5.7L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Brass Construction:** Durable. Easy to clean. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of smooth handle operation and drip-free performance.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

**Choice of Finishes:** Available in Polished Chrome or Satin Nickel (PVD).


**SUGGESTED SPECIFICATION:**

One handle in-wall lavatory faucet shall feature cast brass valve body. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Fitting shall be American Standard Model #2064.461\_\_.

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 and Annex G**

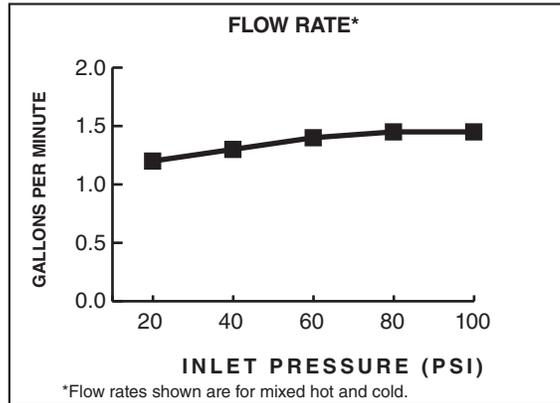

Product Number	Description	Finish Options	
		Polished Chrome	PVD Satin Nickel
2064.461	Serin single control wall mount with grid drain. 	002	295

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
1.0gpm (3.8Lpm) PCA* Aerator	___F10

\*PCA — Pressure Compensating  
 \*\*To modify a product, add suffix after the 4th digit (ex. 2064**F05**101.002)  
 \*\*\*Modified product models are **NOT** WaterSense certified.